


■ STANDARD C-V VALUE REFERENCE BY CASE CODE

μF	U _n	2.5V	4V	6.3V	10V	16V	20V	25V	35V
		OE	OG	OJ	TA	TC	TD	TE	TV
0.47	474					P	A2	A	A
0.68	684					P	A2	A	A
1.0	105				P	J, P	A2	P, A2, A	A2, A
1.5	155			P	J, P	J, A	A2		A
2.2	225			J	J, P	P, A2, A	P, A2, A	A	A, B2
3.3	335		P	J	J, P, A2	P, A2, A	A2, A, B3	A	B3, B2
4.7	475			J, P, A	J, P, A2, A	A2, A	A2, A, B3, B2	B3, B2	C
6.8	685		J	J, P, A2	A2, A	A, B3	B3, B2	B2	C
10	106	J	J, P	J, P, A2, A	P, A2, A, B2	A, B3, B2	B2	C2, C	C, D
15	156	J	P	P, A2, A	A2, B3	A, B2	C	C	D
22	226	P, A2	P, A2, A	P, A2, A, B3, B2	A, B3, B2	B3, B2, C	C2, C, D	D	
33	336	P, A2	P, A2, A	A2, A, B3	B3, B2	B2, C2, C	D	D	
47	476	P, A2, A	P, A2, A, B3	A, B3, B2, C	B2, C2, C	C, D	D		
68	686	A	A, B3	A, B3, B2, C2	B2, C2, C	C, D			
100	107	A, B3, B2	A, B3, B2, C2	A, B3, B2, C2, C	C2, C, V, D	D			
150	157	A, B3, B2	B2, C2	B2, C	V, D				
220	227	B3, B2, C2	B2, C	C, V, D	D				
330	337	B2, C	C, V	V, D					
470	477	B2, C, D	D	D					
680	687		D						

【 A case 】



(Unit: mm)

Case code	EIA code	L	W ₁	W ₂	H	Z
J	1608	1.5±0.1	0.8±0.1	0.8±0.1	0.8±0.1	0.3±0.15
P	2012	2.0±0.2	1.25±0.2	0.9±0.1	1.1±0.1	0.5±0.1
P ₂	2012L	2.0±0.1	1.25±0.1	0.9±0.1	0.9±0.1	0.55±0.1
A3		3.2±0.1	1.6±0.2	1.2±0.1	0.9±0.1	0.8±0.2
A ₂	3216L	3.2±0.2	1.6±0.2	1.6±0.2	1.1±0.1	0.8±0.2
A	3216	3.2±0.2	1.6±0.2	1.6±0.2	1.6±0.2	0.8±0.2
B ₃	3528L	3.5±0.2	2.8±0.2	2.8±0.2	1.1±0.1	0.8±0.2
B ₂	3528	3.5±0.2	2.8±0.2	2.8±0.2	1.3±0.2	0.8±0.2
C ₂		6.0±0.2	3.2±0.2	3.2±0.2	1.4±0.1	1.3±0.2
C	6032	6.0±0.2	3.2±0.2	3.2±0.2	2.5±0.2	1.3±0.2
V		7.3±0.2	4.3±0.2	4.3±0.2	1.3±0.1	1.3±0.2
D	7343	7.3±0.2	4.3±0.2	4.3±0.2	2.8±0.2	1.3±0.2

Unit: mm

Tape Width	A	H Min.	C ± 0.5	D	B ± 0.5	W ₁	W ₂ Max.	R
8 mm		± 50	± 10	± 21 ± 0.5	± 2	9.0 ± 1.0	11.4 ± 1.0	1
12 mm		± 50 ± 0.5	± 10	± 21 ± 1.0	± 2	13.0 ± 1.0	15.4 ± 1.0	1
8 mm		± 50 ± 0.5	± 10	± 21 ± 1.0	± 2	10.0 Max.	14.5 Max.	1
12 mm						14.0 Max.	19.5 Max.	1


Case Code	φ180 Reel	φ330 Reel
J	4000	—
P, P2	3000	—
A3	3000	—
A2(U)	3000	10000
A	2000	9000
B3(W)	3000	10000
B2(B)	2000	9000
C2	1000	4000
V	1000	3000
C, D	800	2800

[Quantity Per Reel]

TAPE AND REEL SPECIFICATIONS

■ Plastic Tape Carrier

Unit: mm

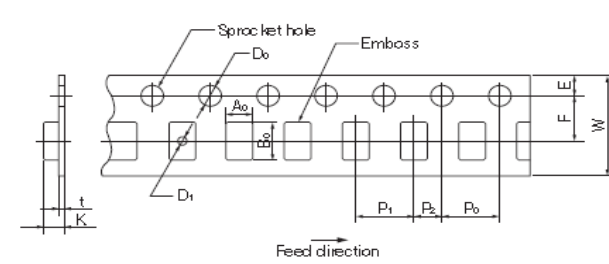

Case Code	A ₁ ± 0.2	B ₁ ± 0.2	K ± 0.2
J	1.0	1.6	1.1
P, P2	1.4	2.2	1.4
A3	1.9	3.5	1.1
A2 (U)	1.9	3.5	1.4
A	1.9	3.5	1.9
B3	3.2	3.6	1.4
B2 (B)	3.3	3.6	2.1
C2	3.7	6.4	1.7
V	3.7	6.4	3.0
C, D	4.6	7.7	2.4